
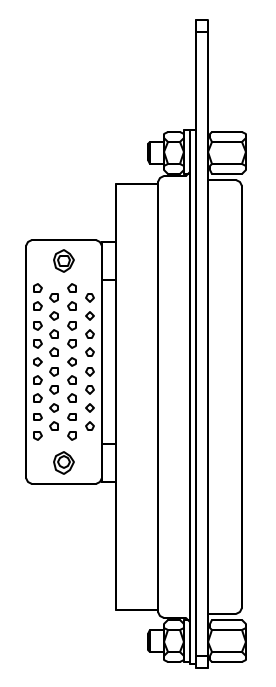
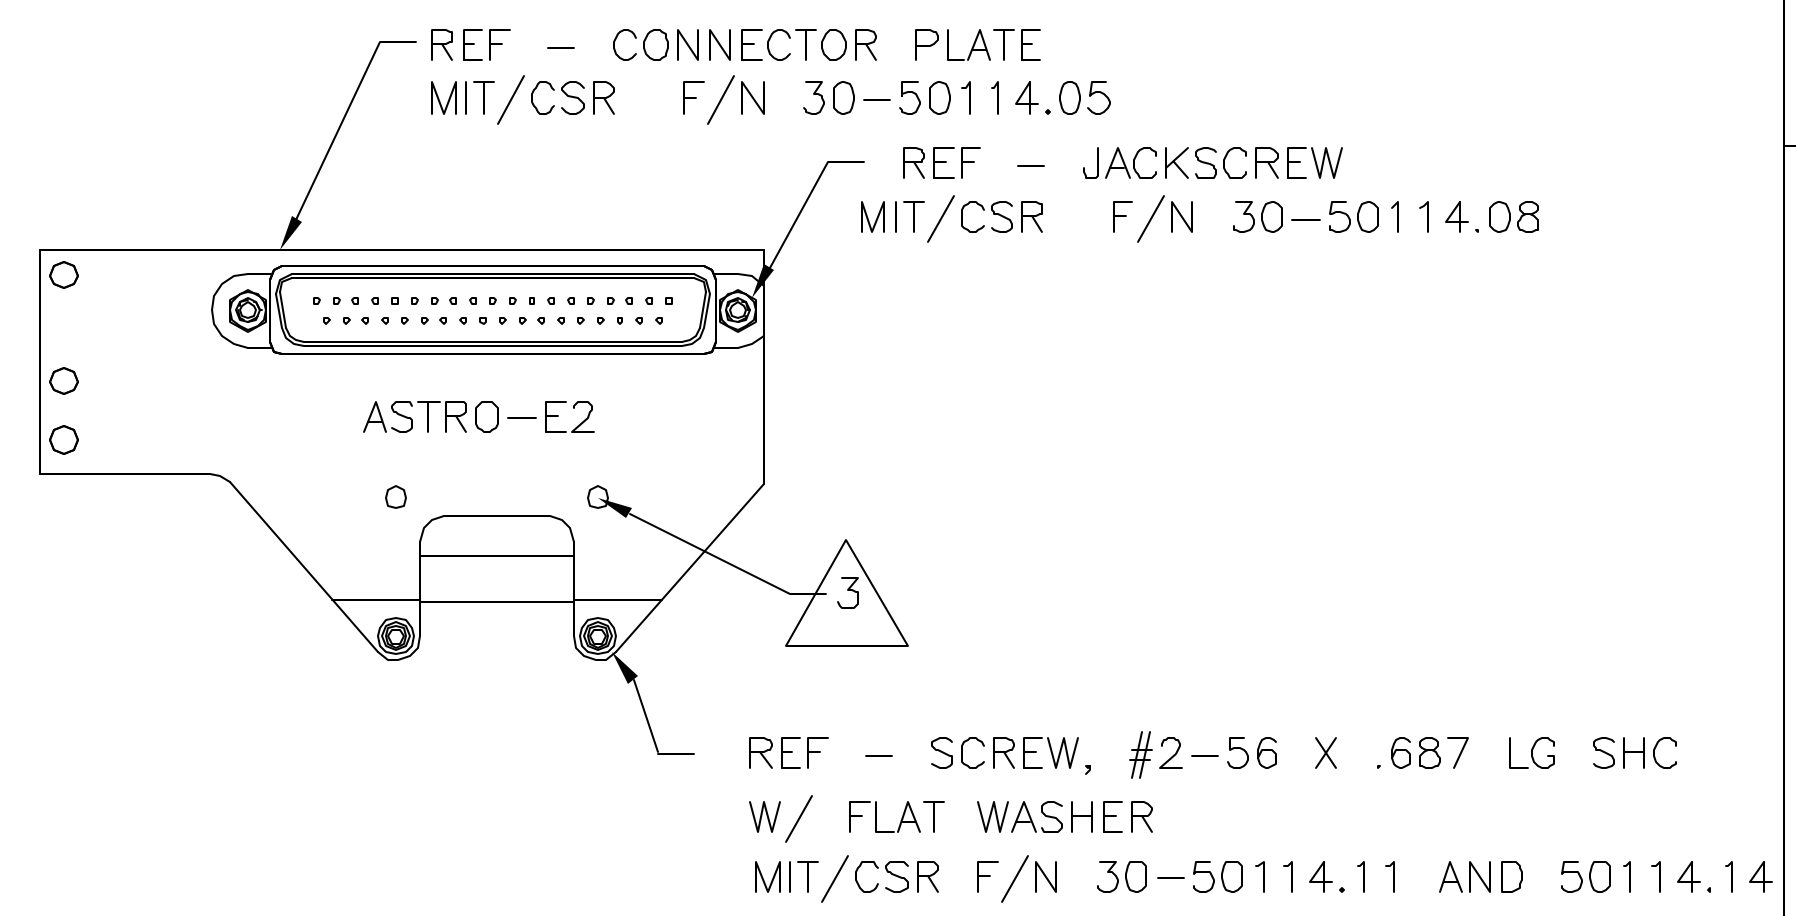
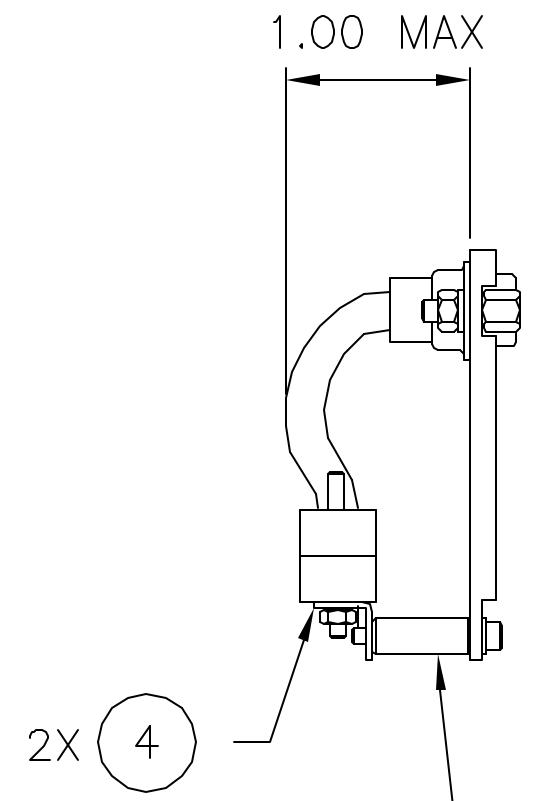


REVISIONS					
REV.	ECO NO.	DESCRIPTION	CHECKED	APPROVED	DATE
A	30-006	INITIAL RELEASE			

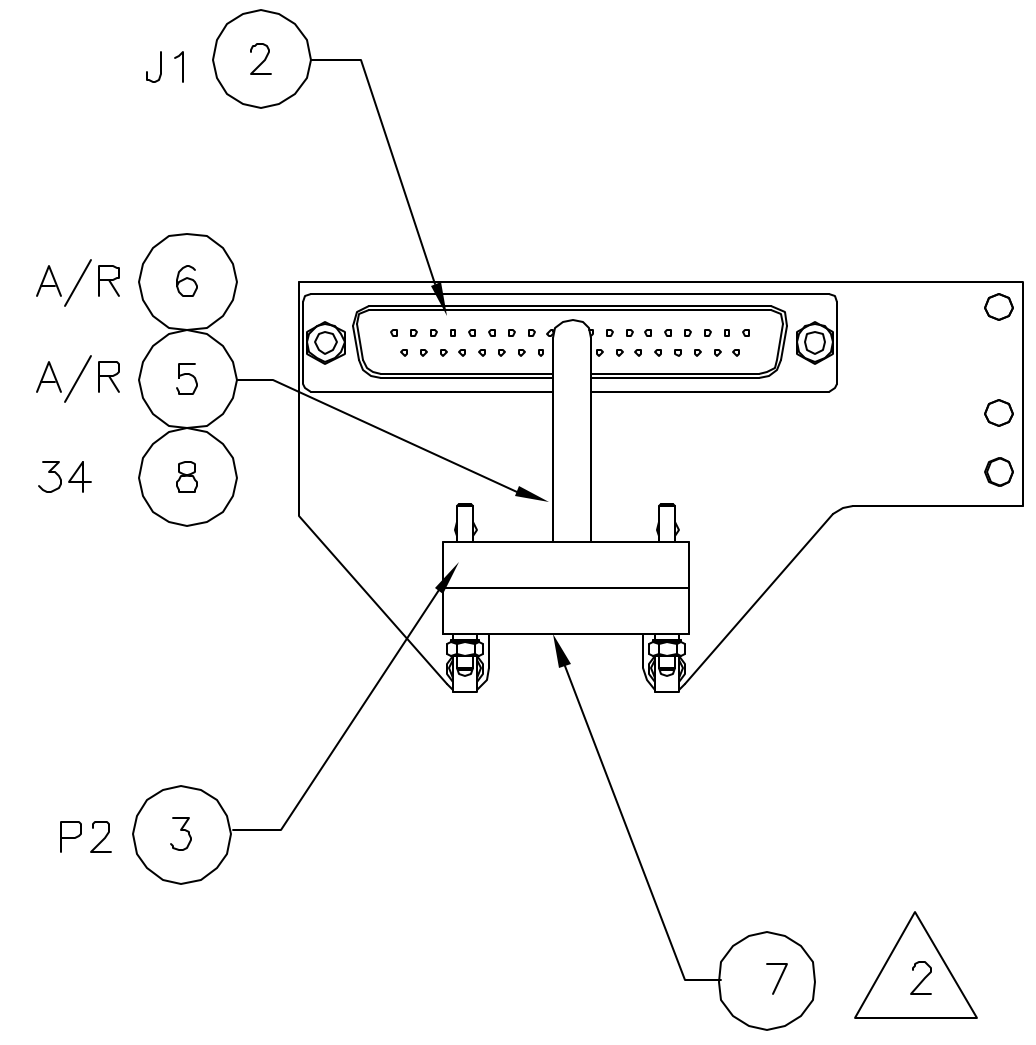

NOTES:

- SEE MIT/CSR DRAWING 30-50114.0601 FOR SCHEMATIC DRAWING.
- DUMMY CONNECTOR TO BE REMOVED AT NEXT HIGHER ASSEMBLY.
- OPTIONAL LOCATION FOR SPACERS AND BRACKETS MAY BE USED DURING WIRE FABRICATION. MOUNT SPACER AND BRACKET HARDWARE TO P2, PRIOR TO INSTALLING JACKPOST HARDWARE TO P2. AFTER WIRING IS COMPLETE REMOVE SPACERS AND BRACKET AND INSTALL JACKPOST HARDWARE TO P2.

		NAME	DATE
		DRAWN	
		CHECKED	
		APPROVED	
		RELEASED	
30-50114	ASTRO-E2		
NEXT HIGHER ASSY	USED ON	WEIGHT	

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS SHALL BE INTERPRETED IAW ANSI Y14.5 - 1982
 DIMENSIONS ARE IN INCHES
 TOLERANCE: ANGLES $\pm 1^\circ$
 3 PLACE DECIMALS $\pm .005$
 2 PLACE DECIMALS $\pm .01$
 THIRD ANGLE PROJECTION

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
 CENTER FOR SPACE RESEARCH
 CAMBRIDGE, MA 02139

CABLE ASSEMBLY,
 CCD TEST FIXTURE, ASTRO-E2

SIZE	CAGE CODE	DWG. NO.	REV.
C	80230	30-50114.06	A

SCALE 1:1 SHEET 1 OF 1