

## AFH461 SERIES


### EMI FILTER HYBRID / HIGH RELIABILITY

#### Description

The AFH Series EMI filter has been designed to provide full compliance with the input line reflected ripple current requirement specified by CE03 of MIL-STD-461C over the extended military temperature range while operating in conjunction with the corresponding AMA, AMF and AMR series of DC/DC converters. These filters are offered as part of a family of high reliability conversion products providing single, dual and triple output voltages while operating from nominal +28 volt input line. Other converters operating with a similar switching frequency will also benefit by use of this device.

These EMI filters are hermetically packaged in a seam welded enclosure utilizing axially oriented copper-core pins which minimize resistive DC losses. This package has been configured to complement the AMA, AMF and AMR packages as a convenience in system installation and is fabricated with International Rectifier's rugged ceramic lead-to-package seal assuring long term hermetic seal integrity in harsh environments.

Designed to meet the stringent requirements of military and aerospace use, these devices are manufactured in a facility fully qualified to MIL-PRF-38534, and are available in two screening grades. The flight grade intended for flight use is fully compliant to the requirements of MIL-PRF-38534 for class H+, augmented as outlined in the screening table.




AFH

#### Features

- Up to 2.0 A Output Current
- Attenuation > 60dB@500 KHz
- Low Profile Seam Welded Package
- Ceramic Insulated Copper Core Pins
- Operation Over Full Military Temp. Range
- No Derating for -55°C to +125°C

The EM grade is processed and screened to a lower grade requirement. Flight grade are tested to meet the complete group "A" test specifications over the full military temperature range with no derating. Variations in electrical, mechanical and screening requirements can be accommodated. Contact IR Santa Clara for special requirements.

#### Typical Connection Diagram

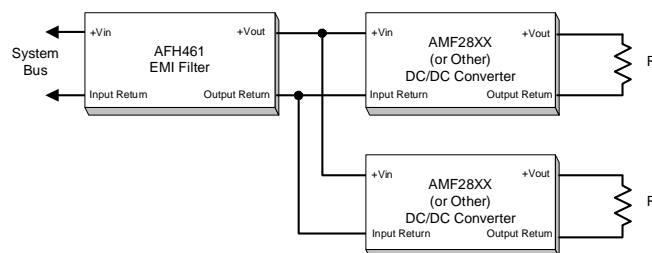

Specifications

| ABSOLUTE MAXIMUM RATINGS <i>Note 1</i> |                            |
|--|----------------------------|
| Input Voltage                          | -80V to +80V <i>Note 2</i> |
| Input Current                          | 3.0 A                      |
| Lead Soldering Temperature             | 300°C for 10 seconds       |
| Case Temperature - Operating           | -55°C to +125°C            |
| Case Temperature - Storage             | -65°C to +135°C            |


Electrical Characteristics  $-55^{\circ}\text{C} \leq T_{\text{CASE}} \leq +125^{\circ}\text{C}$ ,  $0 \leq V_{\text{IN}} \leq +50$  unless otherwise specified

| Parameter                    | Group A Subgroups | Test Conditions  | Min  | Nom | Max                | Unit             |
|------------------------------|-------------------|--|------|-----|--------------------|------------------|
| INPUT VOLTAGE                | 1, 2, 3           | $I_{\text{IN}} \leq 500\mu\text{A}$  | 0    |     | +40                | $V_{\text{DC}}$  |
|                              |                   | Transient <i>Note 2</i>  | -50  |     | +50                |                  |
| OUTPUT CURRENT <i>Note 3</i> |                   |  |      |     | 2.0                | $A_{\text{DC}}$  |
| DC RESISTANCE <i>Note 4</i>  | 1                 | $T_{\text{C}} = 25^{\circ}\text{C}$  |      | 150 | 250                | $\text{m}\Omega$ |
| POWER DISSIPATION            |                   | Maximum Current<br>$T_{\text{C}} = 25^{\circ}\text{C}$                               |      |     | 1.0                | W                |
| NOISE REDUCTION              | 4, 5, 6           | $T_{\text{C}} = 25^{\circ}\text{C}$<br>1KHz<br>200 KHz - 500 KHz<br>500 KHz - 10 MHz | -1.0 |     | +1.0<br>-40<br>-60 | dB               |
| ISOLATION                    | 1                 | Any Pin to Case<br>Tested @ 500VDC   | 100  |     |                    | $\text{M}\Omega$ |
| CAPACITANCE                  | 1, 2, 3           | Measured Between Any Pin and Case  | 32   | 44  | 48                 | nF               |
| DEVICE WEIGHT                |                   | Slight Variations with Case Style  |      | 30  |                    | g                |


Notes to Specifications

1. Operation above maximum ratings may cause permanent damage to the device. Operation at maximum ratings may degrade performance and affect reliability.
2. Device can tolerate  $\pm 100$  Volt transient whose duration is  $\leq 100$  ms when  $R_{\theta} \geq 0.5 \Omega$ .
3. Derate Output Current linearly from 100% at 125°C to 0 at 135°C.
4. DC resistance is the total resistance of the device and includes the sum of the *input to output* resistance and the *return in to return out* resistance paths.

**Typical Filter CE03 Performance**

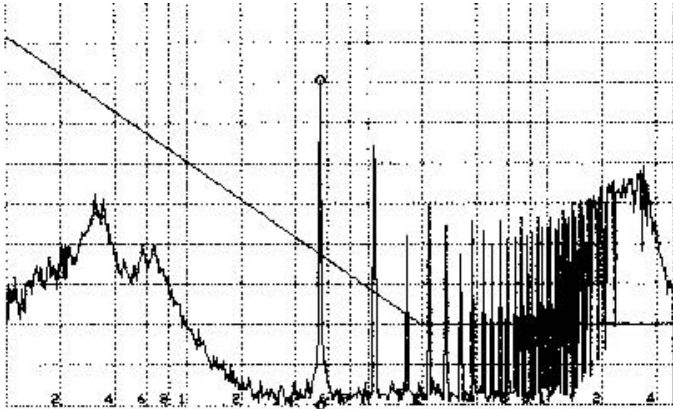

**AHF2805S CE03 Performance without AFH461 Filter**

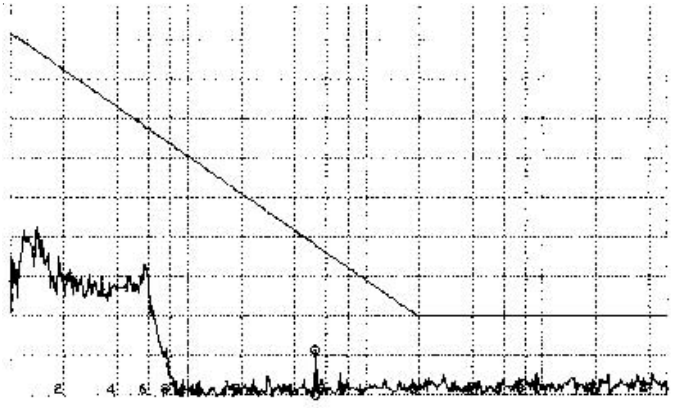


**AHF2805S CE03 Performance with AFH461 Filter**


**Available Screening Levels and Process Variations for AFH461 Series**

| Requirement                                   | MIL-STD-883 Method            | Flight No Suffix       | /EM Suffix      |
|---|-------------------------------|------------------------|-----------------|
| Temperature Range                             |                               | -55°C to +125°C        | -55°C to +125°C |
| Element Evaluation                            |                               | MIL-PRF-38534, Class K | —               |
| Internal Visual                               | 2017                          | Yes                    | Yes             |
| Temperature Cycle                             | 1010                          | Cond C                 | —               |
| Constant Acceleration                         | 2001                          | Cond A                 | —               |
| Burn-in Interim Electrical @ 160 hrs          | 1015                          | 320 hrs @ 125°C        | 48 hrs @ 125°C  |
| Final Electrical (Group A) Read & Record Data | MIL-PRF-38534 & Specification | -55°C, +25°C, +125°C   | +25°C           |
| PDA (25°C, interim to final)                  |                               | 2%                     | —               |
| Seal, Fine & Gross                            | 1014                          | Cond A, C              | Cond A, C       |
| Radiographic                                  | 2012                          | Yes                    | —               |
| External Visual                               | 2009                          | Yes                    | Yes             |

**AFH461 Block Diagram**

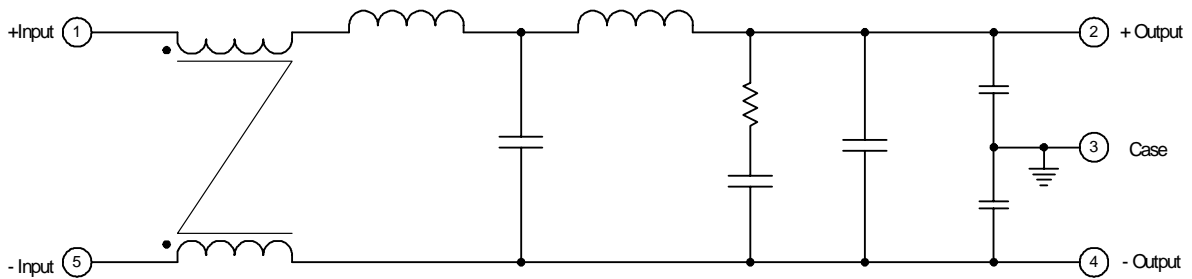

**AFH461 Case Style Outline**

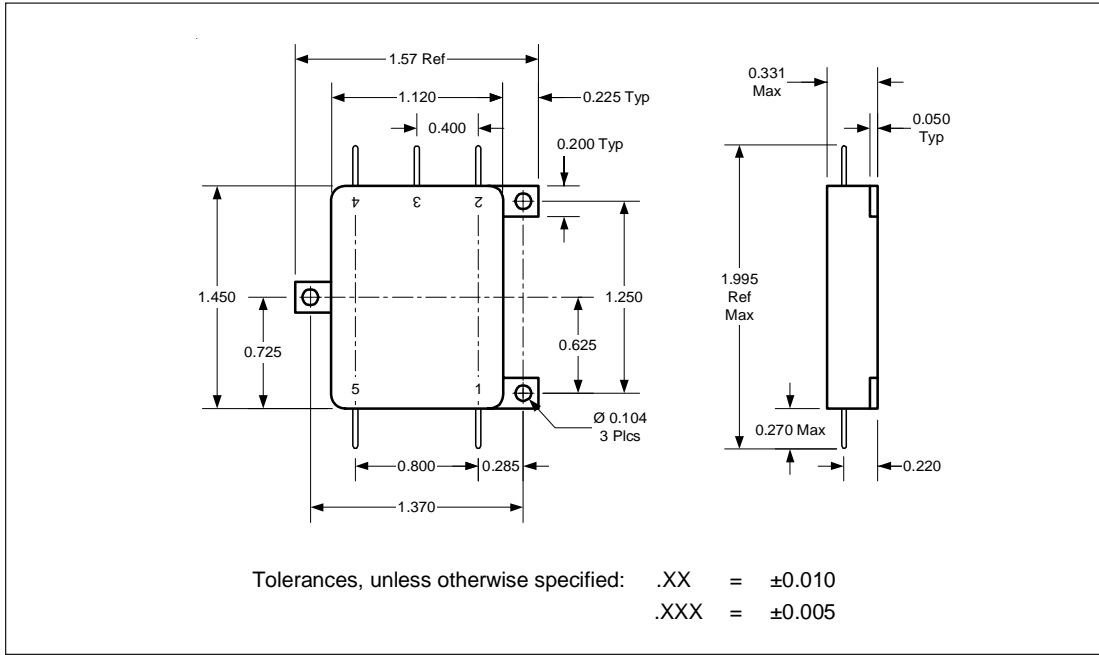

**Pin Designation**

| Pin No. | Designation     |
|---------|-----------------|
| 1       | Positive Input  |
| 2       | Positive Output |
| 3       | Case Ground     |
| 4       | Output Common   |
| 5       | Input Common    |

**Part Numbering**

**AFH 461 / EM**

