


REVISIONS					
REV.	ECO NO.	DESCRIPTION	CHECKED	APPROVED	DATE
A	85-093	Initial Release	RFG	RF	5/04/05

VOILA EE

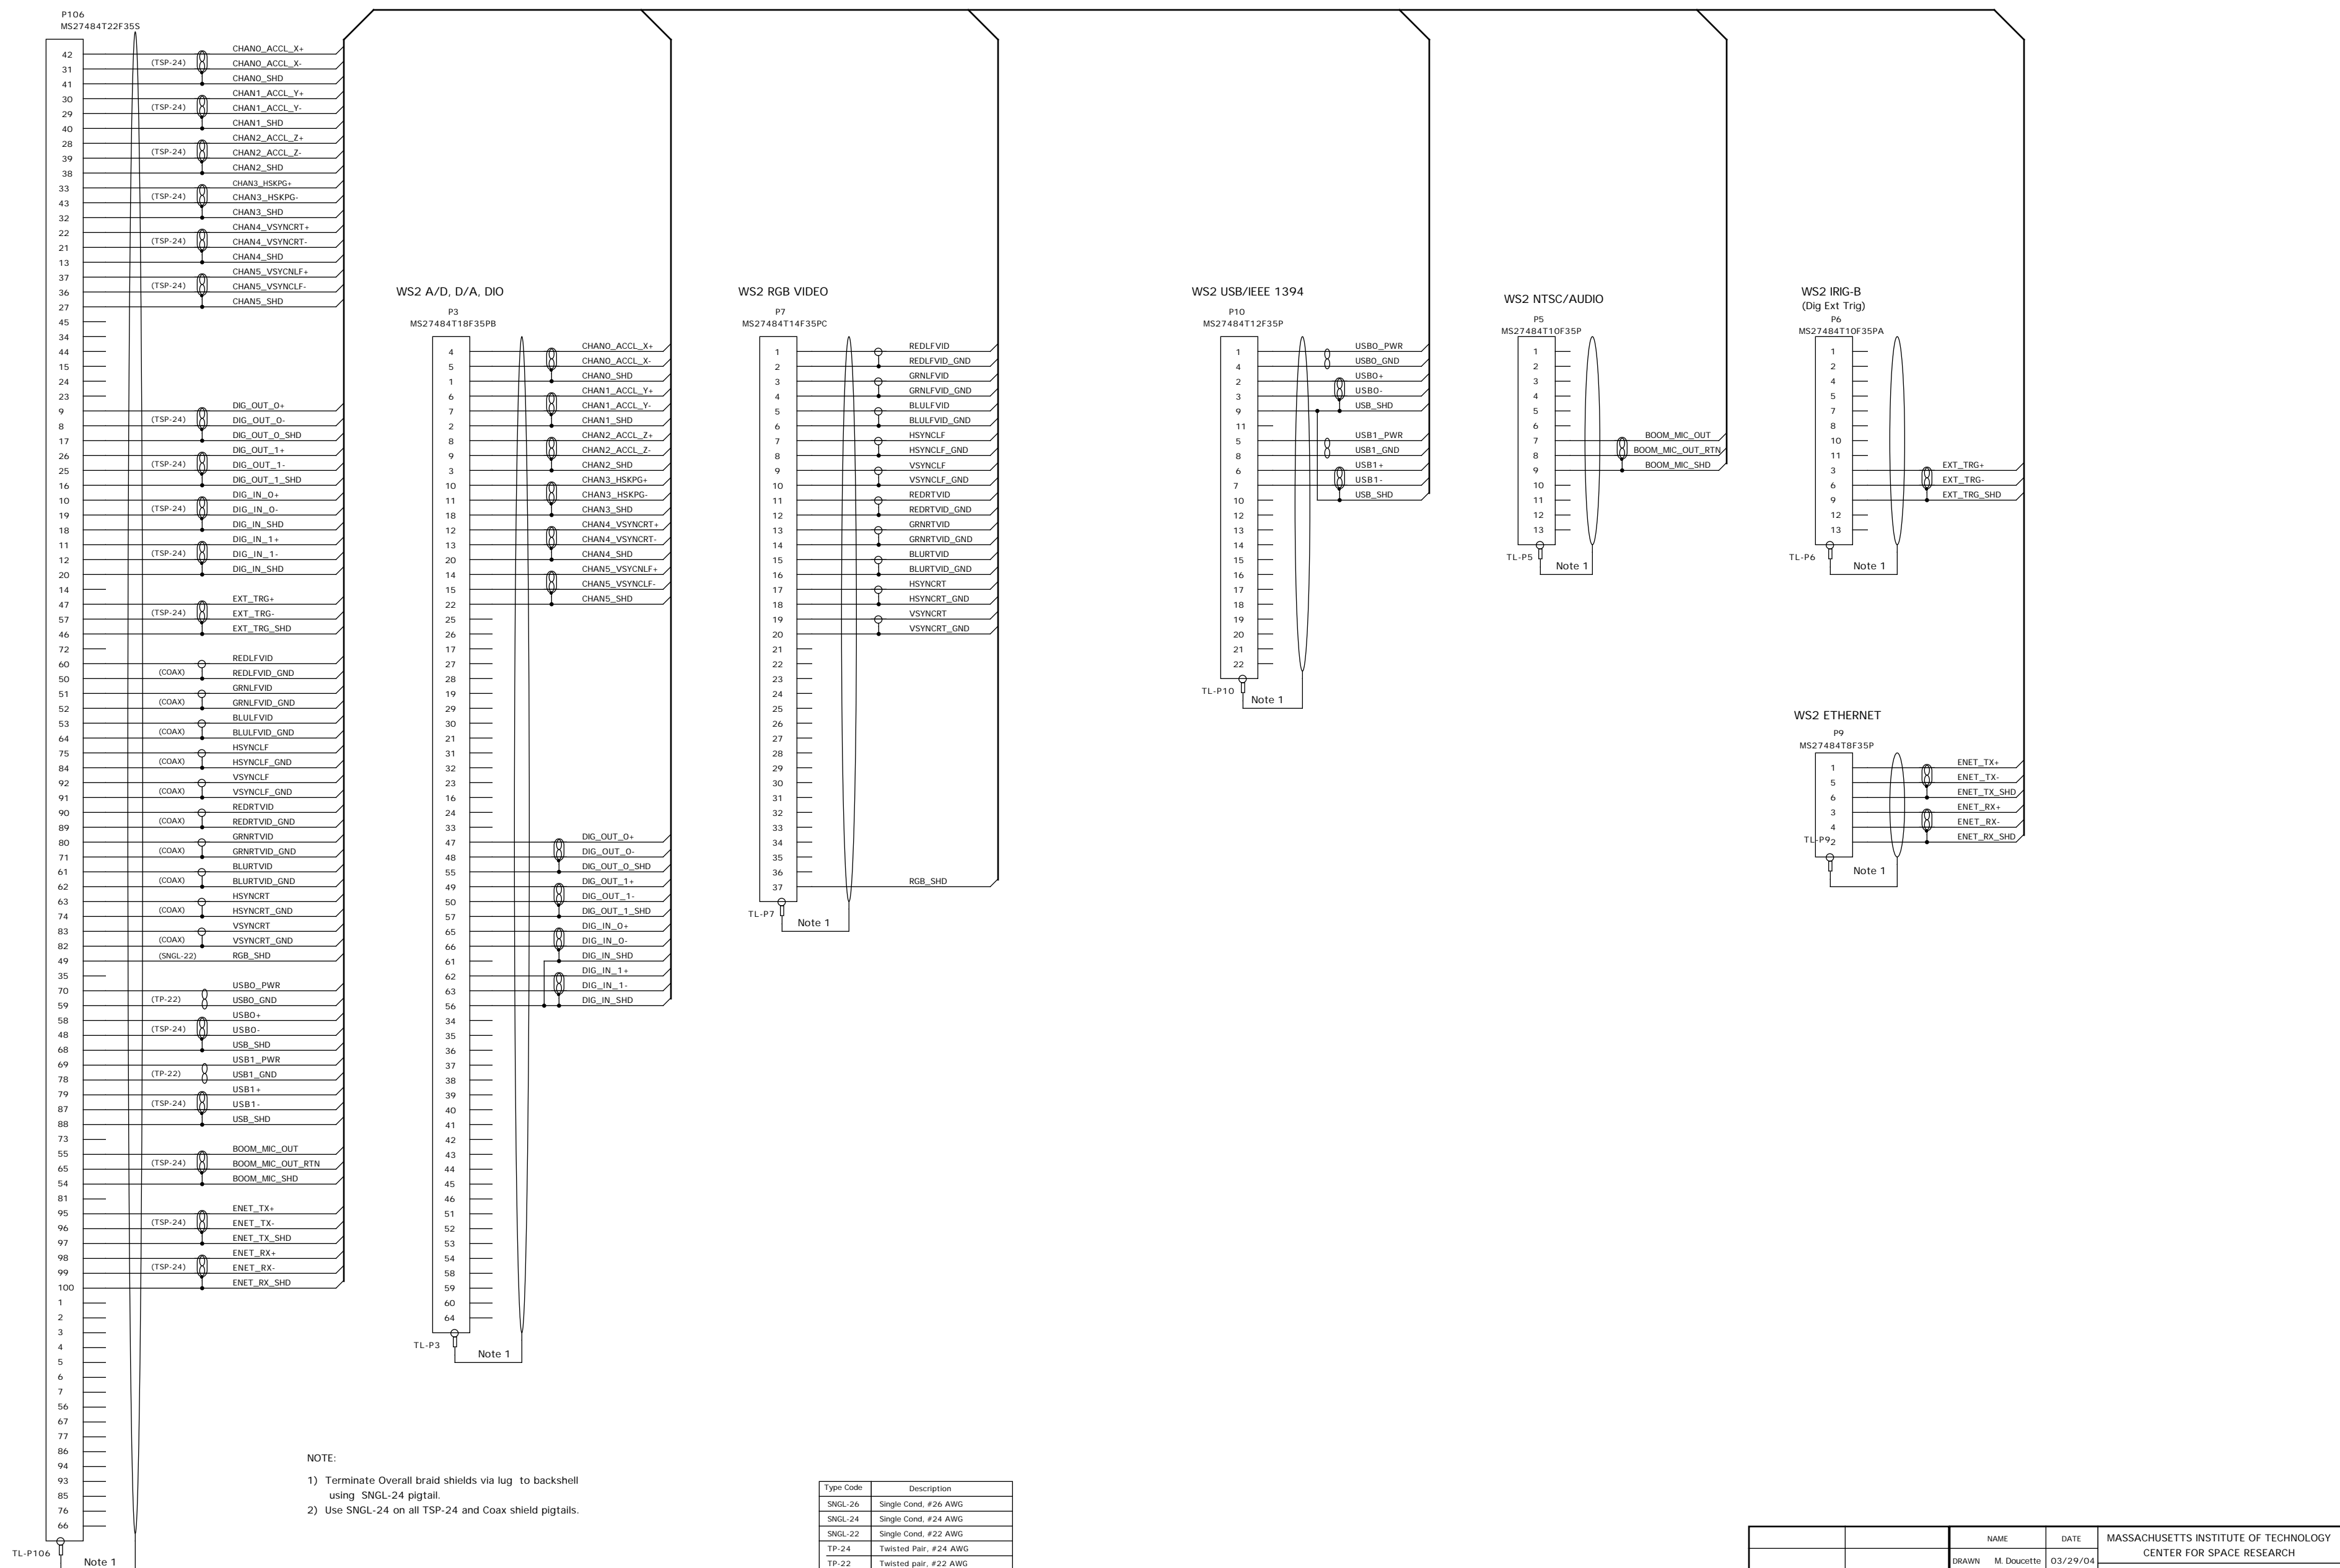

NOTE:  
 1) Terminate Overall braid shields by lug to backshell using SINGL-24 pigtail.  
 2) Use SINGL-24 on all TSP-24 and Coax shield pigtails.

Type Code	Description
SINGL-26	Single Cond. #26 AWG
SINGL-24	Single Cond. #24 AWG
SINGL-22	Single Cond. #22 AWG
TP-24	Twisted Pair, #24 AWG
TP-22	Twisted pair, #22 AWG
TT-24	Twisted Triple, #24 AWG
TSP-24	Twisted Shield Pr, #24 AWG
TSP-22	Twisted Shield Pr, #22 AWG
TST-24	Twisted Shield Triple, #24 AWG
Coax	COAX, #24 AWG
Shld	Braid, tinned copper

REV.	ECO NO.	DESCRIPTION	CHECKED	APPROVED	DATE
A	85-093	Initial Release	RFG	RF	5/04/05

85-40801	VOILA	APPROVED	R. Foster	04/23/04	SIZE C	CODE IDENT NO. 80230	DRAWING NO. 85-03020.01	REV. A
NEXT ASSEMBLY		USED ON		RELEASED	D. Gage	04/28/04	SCALE	SHEET 1 OF 1

MASSACHUSETTS INSTITUTE OF TECHNOLOGY  
 CENTER FOR SPACE RESEARCH  
 Schematic  
 Cable  
 WS2 to Voila Electronics Enclosure