


REVISIONS					
REV.	ECO NO.	DESCRIPTION	CHECKED	APPROVED	DATE
A	85-093	Initial Release	RFG	RF	5/5/04
B	85-146	P201 keying was "B" & shown as 5 pins.. Sid_PWR was TSP-22.	RFG	RF	9/28/04
C	85-181	USB cable was 2 TSP-24 conductors.	RGF	RF	1/5/05

MS27484T8F35PA

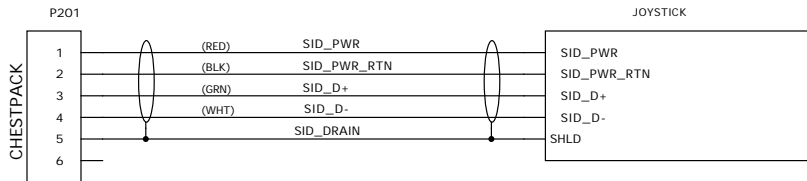

NOTES:

- 1) Connect USB cable drain to P201-5 with single conductor #24 AWG pigtails.

Type Code	Description
SNGL-26	Single Cond, #26 AWG
SNGL-24	Single Cond, #24 AWG
SNGL-22	Single Cond, #22 AWG
TP-24	Twisted Pair, #24 AWG
TP-22	Twisted pair, #22 AWG
TT-24	Twisted Triple, #24 AWG
TSP-24	Twisted Shield Pr, #24 AWG
TSP-22	Twisted Shield Pr, #22 AWG
TST-24	Twisted Shield Triple, #24 AWG
Coax	COAX, #24 AWG
Shld	Braid, tinned copper

		NAME	DATE	MASSACHUSETTS INSTITUTE OF TECHNOLOGY CENTER FOR SPACE RESEARCH				
		DRAWN	M. Doucette	04/12/04	Schematic VOILA Joystick			
		CHECKED	R. Goeke	5/5/04				
85-40600	VOILA	APPROVED	R. Foster	5/5/04				
NEXT ASSEMBLY	USED ON	RELEASED	D. Gage	5/05/04	SIZE A	CODE IDENT NO. 80230	DRAWING NO. 85-03020.45	REV. C
APPLICATION				SCALE	SHEET 1 OF 1			