
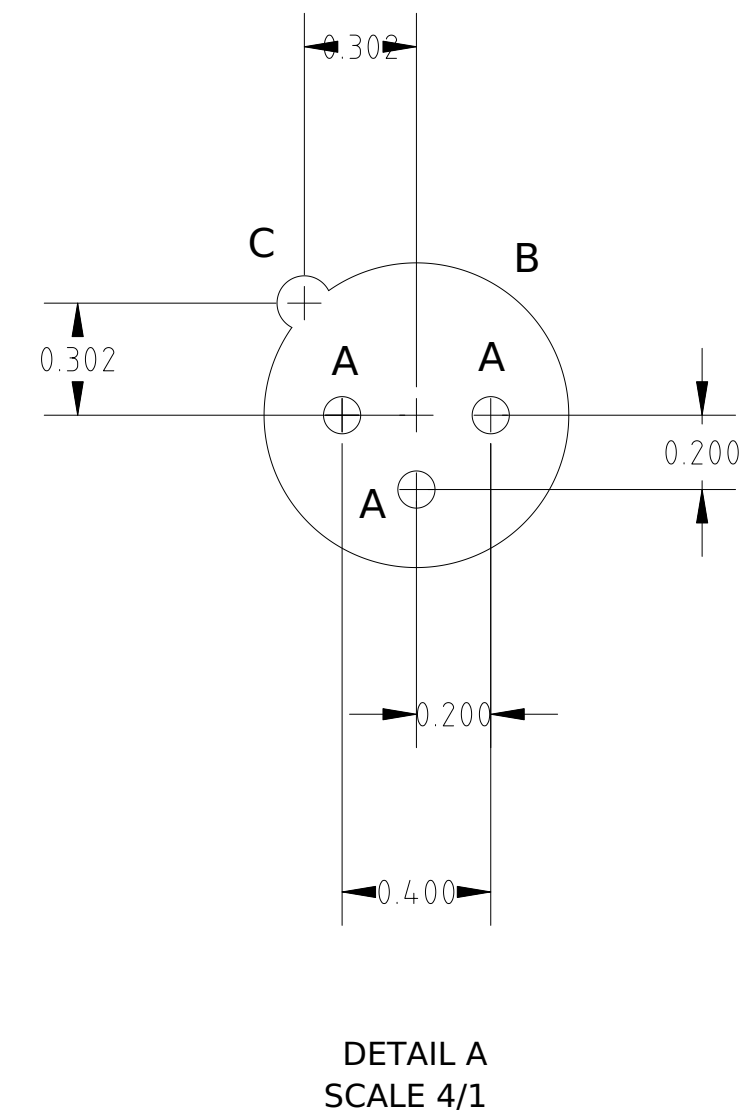
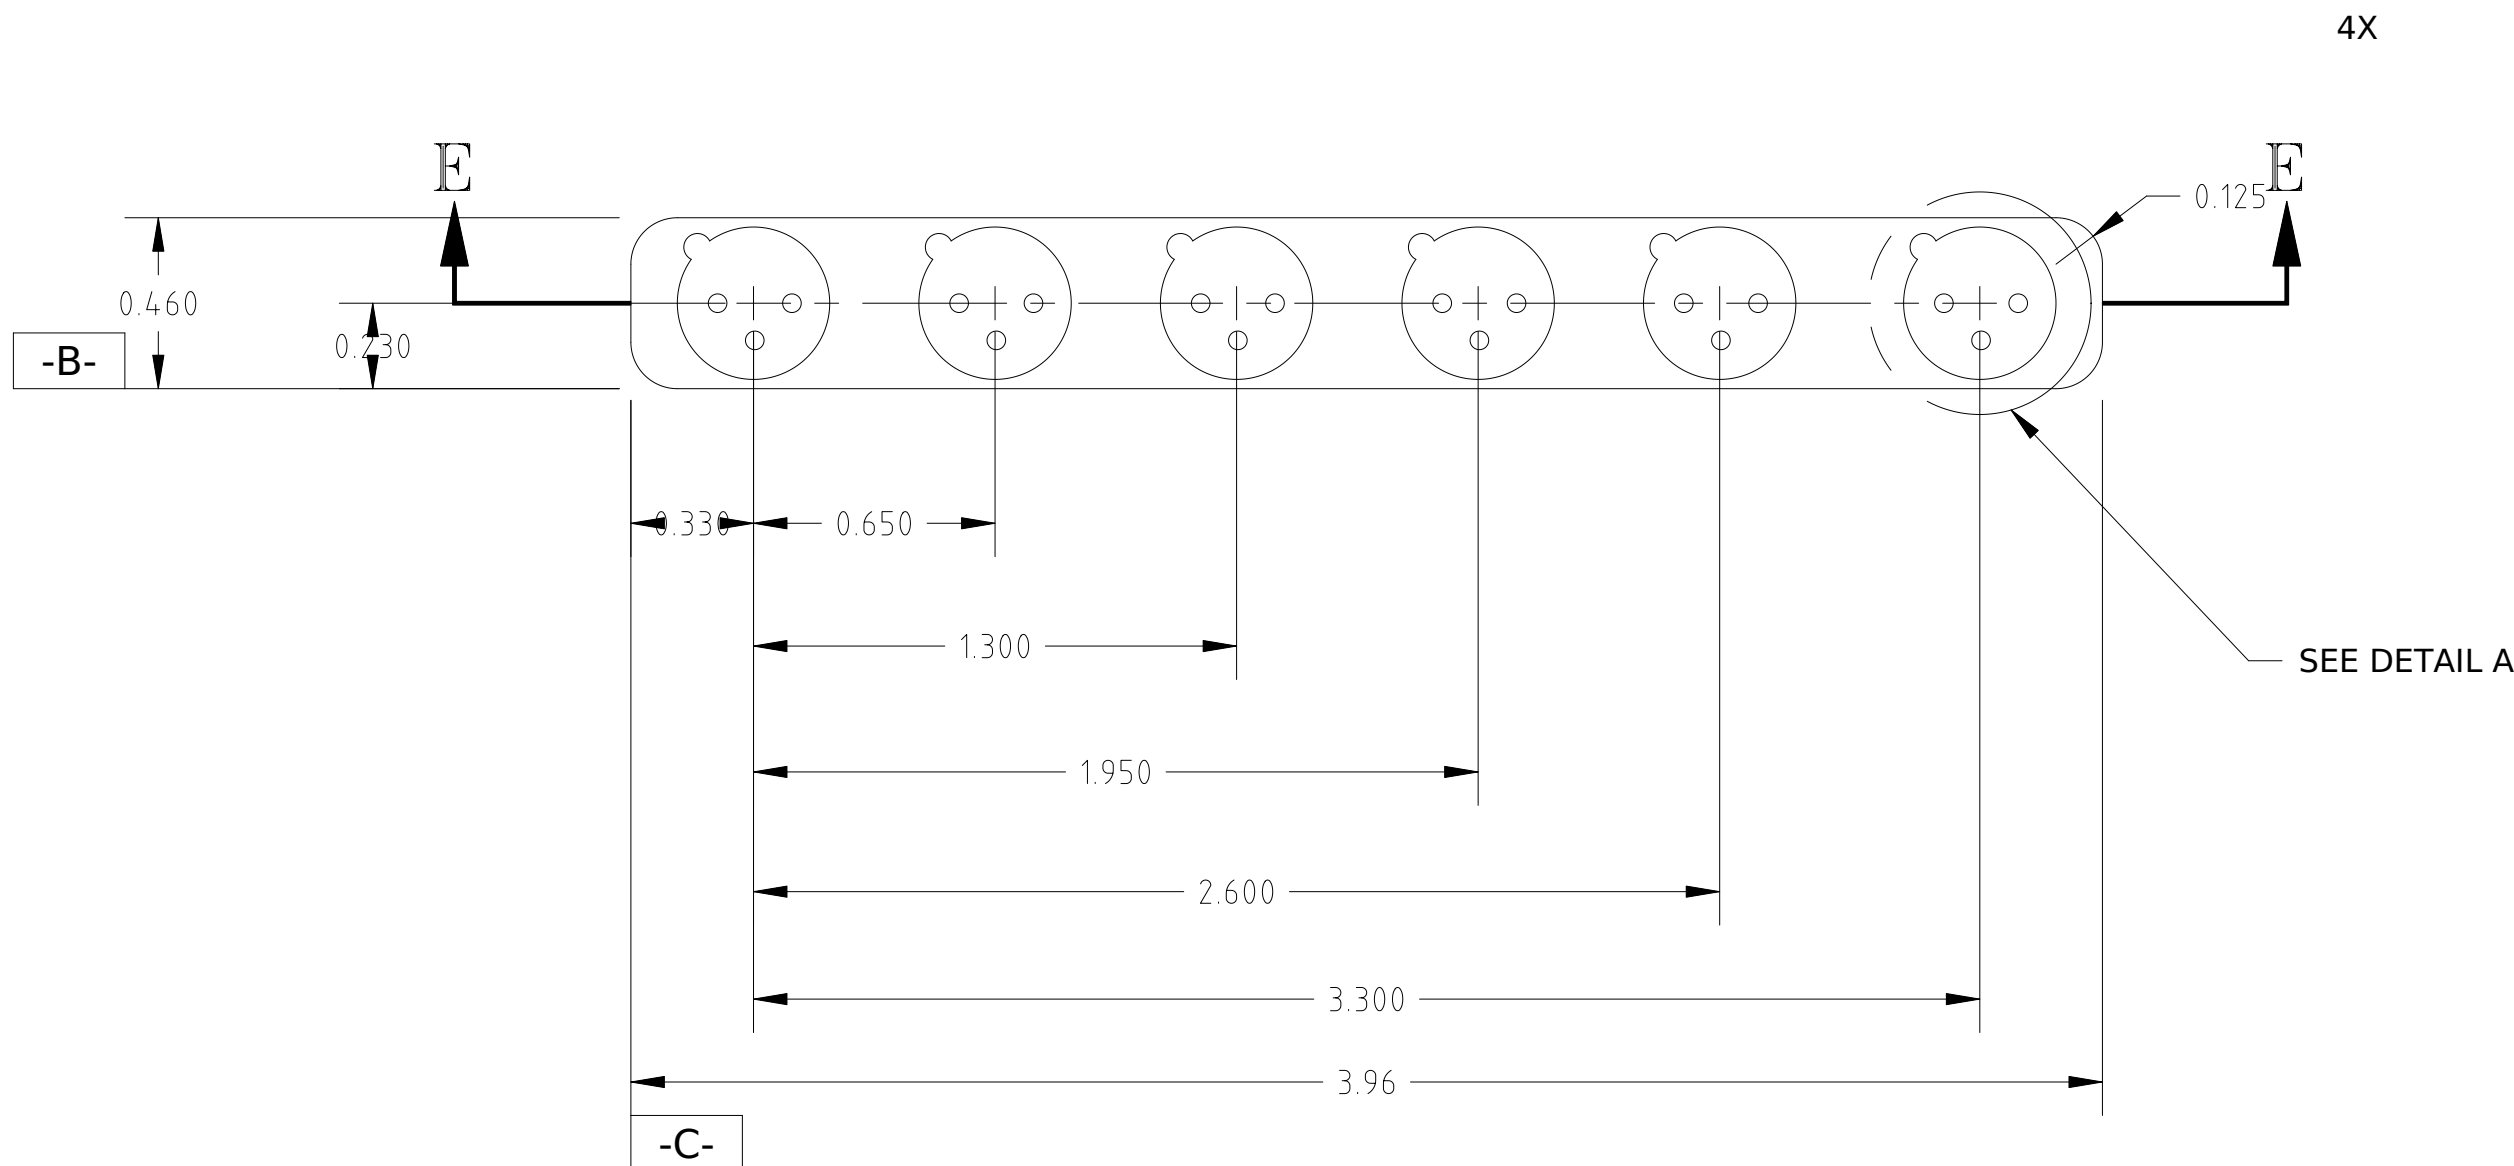


HOLE CHART		
HOLE	QTY	DIAMETER/DESCRIPTION
A	18	$\phi.040^{+.003}_{-.002}$ THRU
B	6	$\phi.397^{+.003}_{-.002}$ C'BORE .055 DEEP
C	6	$\phi.073^{+.003}_{-.002}$ C'BORE .055 DEEP

$\phi.010$ (M) A B C

REVISIONS					
REV.	ECO NO.	DESCRIPTION	CHECKED	APPROVED	DATE
A	36-581	INITIAL RELEASE			

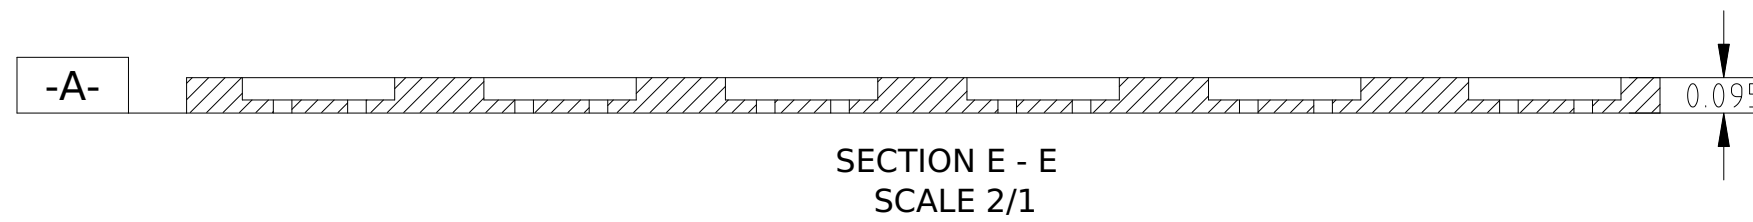

NOTES:
1. MATL: BORON NITRIDE GRADE AX05

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE: ANGLES $\pm 1^\circ$ 3 PLACE DECIMALS $\pm .005$ 2 PLACE DECIMALS $\pm .01$	NAME	DATE	MASSACHUSETTS INSTITUTE OF TECHNOLOGY CENTER FOR SPACE RESEARCH CAMBRIDGE, MA 02139				
			DRAWN M.Lyons	26NOV95					
		MATERIAL	CHECKED	APPROVED	HEAT SINK				
			RELEASED						
NEXT ASSEMBLY	USED ON	INTERPRET DIMENSIONS AND TOLERANCES IAW ANSI Y14.5M-1982	WEIGHT	SIZE	<table border="1" style="font-size: small;"> <tr> <td>C</td> <td>80230</td> <td>36-20201.10</td> <td>A</td> </tr> </table>	C	80230	36-20201.10	A
C	80230		36-20201.10	A					
APPLICATION				SCALE	<table border="1" style="font-size: small;"> <tr> <td>2/1</td> <td></td> <td></td> <td>SHEET 1 OF 1</td> </tr> </table>	2/1			SHEET 1 OF 1
2/1			SHEET 1 OF 1						