

PEP-CP306

Pentium® M

Rugged CPU



Effective

Even-tempered

Robust

Compact PCI

- ▶ More value with Intel® Pentium® M up to 1.6GHz and 1MB L2 cache
- ▶ Less rejected heat through better power saving
- ▶ Extended Temperature and shock/vibration resistance

Determined designed CPU Robustness implemented

Kontron Modular Computer's CompactPCI PEP-CP306 CPU demonstrates high PC computing performance in a first-rate resistant construction

The PEP-CP306 CompactPCI system controller board combines the performance of Intel's Mobile Pentium® M processor with the high integration of the 855GME chipset and the I/O Controller Hub ICH4. Realized as a 3U single slot processor card it contributes to high density packaging.

Computing performance

Pentium M clock speed statements are not directly comparable to those of Pentium 4. The new low power Pentium M processors offers at 1.6GHz the same performance as Pentium 4 at 2.4GHz up to 2.7GHz, but dissipates only half of the thermal. This is achieved by several architecture improvements over Pentium 4 like larger caches, faster busses, enhanced SpeedStep with aggressive clock gating to turn off circuits not in use very quick and enables real-time dynamic switching between multiple voltage and frequency points to reduce idle power.

Temperature resistance

The Pentium M architecture allows a high internal temperature and thus make it possible to work up to high extended temperature ranges. Together with its directly soldered thin BGA package it enables sufficient space for a passive heatsink within 4HP.


Shock resistance

The direct soldered processor and memory provide less weight and a higher shock/vibration- resistance than socket devices can. The fan-less heat sink is tightly screwed on the board.

Graphic performance

With the 855GME integrated graphics accelerator delivering high performance 2D, 3D and video capabilities it supports intense, realistic 3D graphics with sharp images and enables balanced memory usage between

Functional Block Diagram

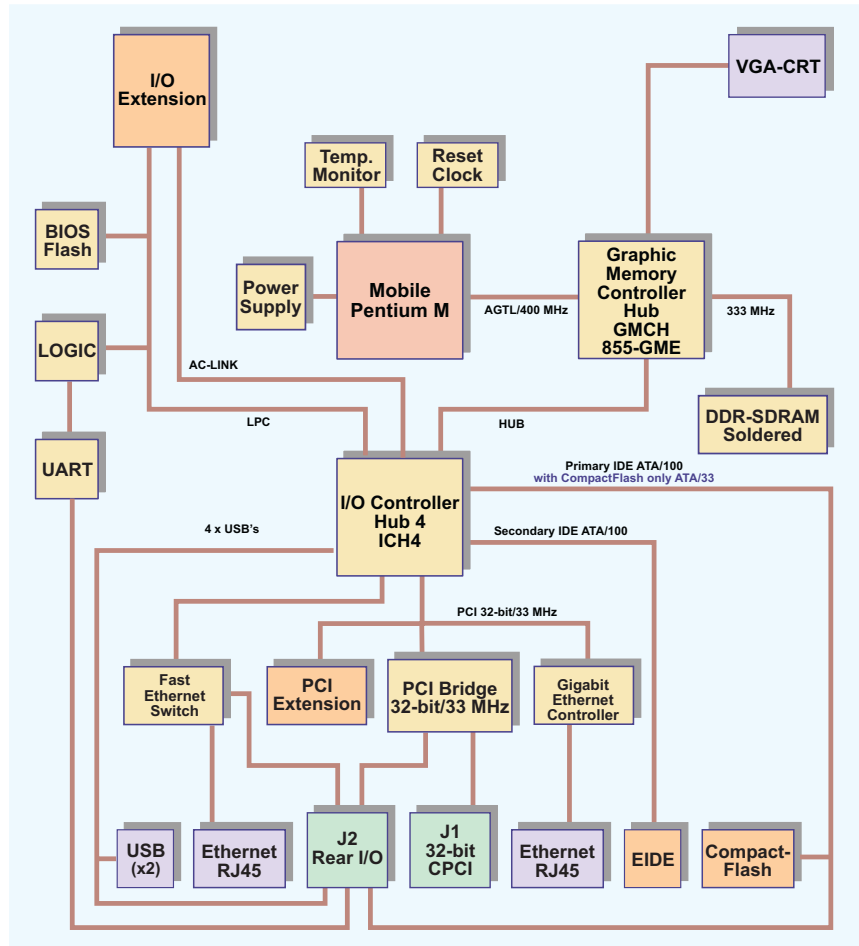


- CPU
- Front Panel Connectors
- Bus Connectors
- Onboard Connectors

graphics and system for optimal performance (up to 64MB of dynamic video memory allocation). It further offers display image rotation 90°, 180°, 270° and follows DirectX and OpenGL pixelization rules.

I/O connectivity

The 4HP version comes with the most important interfaces, the 8HP version supports legacy interfaces as well. With the PCI and LPC expansion connectors, the CP306 is an ideal platform for 8HP customized CPU's as well.

Frontpanel

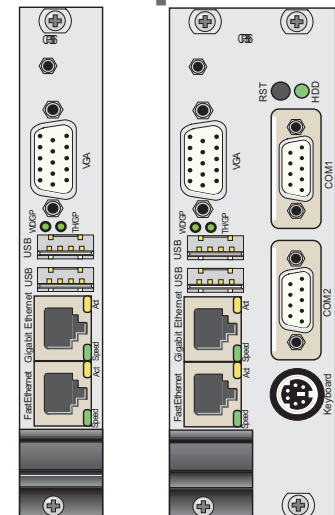

Specifications

... just technical facts:

Processor

Mobile low power Pentium® M processor in Micro-FCBGA 479 package
 2x 32KB L1 cache and 1MByte L2 cache
 400MHz processor system bus
 0.13u silicon process with 1.48V (1.6GHz) / 1.18V (1.1GHz) / 0.96V / 600MHz core voltage
 Maximum internal junction temperature 100°C
 Long term available versions:
 - 1.1GHz LV low power dissipation, extended temperature range option
 - 1.6GHz high performance /higher frequency versions when available
 All board versions are passive cooled, fan-less heatsink within 4HP height

Memory

333 MHz memory speed, Intel® 82855GME GMCH
 256MByte or 512MByte soldered DDR-SDRAM with ECC
 CompactFlash socket type II (Flash or Microdrive HDD)
 Onboard 2.5" HDD mounting within 8HP
 1MB Firmware Hub for BIOS
 8KByte EEPROM for CMOS data storing (no battery operation)

Connectivity

4HP board:

Ethernet: 1st: Intel® 82540EM based 10/100/1000MBit/s Gigabit Ethernet controller at front
 2nd: Intel® 82801DB ICH4 10/100Base-TX Ethernet controller (based on 82559; front or rear IO)
 VGA: Intel® 82855GME GMCH internal VGA controller providing 2048x1536x8bit/60Hz resplution, max. shared memory 64MB
 USB: 4x USB2.0 channels up to 480Mbit/s, 2 as front IO, 2 as rear IO
 COM: UART with two 16C550 compatible RS232 ports as rear IO
 IDE: Two EIDE interfaces, Ultra ATA\100, 100MB/sec
 Primary port ATA\33 connected to CompactFlash socket & rear IO
 Secondary port ATA\100 40-pin, 2.54mm connector onboard

8HP additions:

COM: Additional 2 COM ports (front IO), 4 COM ports in total
 PS/2: PS/2 for keyboard and mouse legacy support (front IO)
 IDE: Secondary port ATA\100 two 40-pin, 2.54mm connector s, one for onboard 2.5" EIDE Flash Disk or HDD mounting option, anotherone for external devices like CD-ROM
 Floppy: Standard Floppy connector
 LPT: The parallel port is accessible as onboard 26-pin row connector

Front Panel Functions

4HP:

Ethernet: Two RJ-45 with integrated LED's (ACT, SPEED)
 Top connector: VGA-CRT 15-pin D-Sub SVGA connector
 USB: Two 4-pin connectors
 LED-s: ACT, SPEED (LAN), Thermal, Watchdog or both general purpose

8HP:

Additional to 4HP
 COM1/2: Two 9-pin D-Sub (RS232/422/485 jumper selectable)
 Key/Mouse: PS/2
 Reset: Reset button, guarded
 LED: HDD active

On-board inter-module interfaces

PCI and LPC (Low Pin Count - the ISAbus replacement) build the connection between the basic CPU board with any I/O extension module, resulting in a double slot (8HP) solution.

Rear I/O via J2

The Rear I/O versions support:
 - 32-bit/33 MHz CompactPCI interface
 - Two USB1.1 ports
 - One Fast Ethernet port without LED
 - Two COM ports (TTL level)
 - CRT VGA port
 - One fan control input
 - One general purpose output
 - Input for external backup battery

CompactPCI Bus Interface

PICMG 2.0 Rev. 3.0 compatible, 32-bit/33MHz System master
 5V VI/O (3.3V on request), 7 Req/Gnt & clock lines
 Version with rear I/O on J2 PICMG 2.0

Supervisory Functions, Clock/Calendar

Watchdog, software configurable, 125 msec to 256 sec. in 12 steps, generates IRQ, NMI or hardware reset, two stage configuration for NMI and Reset
 Hardware monitor LM87 for thermal control, fan-sense and all important onboard voltages
 ICH4 internal RTC (MC146818 compatible), RTC and 256 Byte CMOS RAM with backup, battery replaceable

Hot Swap

Support for all signals to allow peripheral boards to be hot swapped. The individual clocks for each slot and access to the backplane ENUM# signal comply with the PICMG 2.1 Hot-Swap specification.

Compliance

CompactPCI Core Specification PICMG 2.0 Rev. 3.0
 CompactPCI Hot Swap Specification PICMG 2.1 R2.0
 Designed to meet or exceed:
 - Safety: UL 1950, UL 94, CSA 22.2 No 950, EN 60950, IEC 950
 - EMI/EMC: EN 55022 / EN 55024, EN 50081-1 / EN 6100-6-2"

General

Dimensions: 100mm x 160mm
 Weight: 300g / 4HP, 400g / 8HP
 MTBF: 117,000h

Software Support

Phoenix BIOS with QuickBoot, QuietBoot, BootBlock, MultiBoot III, PC Health Monitoring, Serial port remote control with CMOS setup access, BIOS parameters saved in EEPROM, diskless, keyboardless, videoleess operation. LAN boot support. USB Floppy boot, USB memory stick boot. Plug&Play capability.
 Board identification number accessible via EEPROM
 Support for Windows 2000, XP Pro, XP Embedded, Linux®, VxWorks®, (other OS's may be possible, please contact us for information).

Power Consumption

+5V/ 3W, +3.3V/ 3W,	typ. 6W	at 600MHz
+5V/ 4W, +3.3V/ 5W,	max. 9W	at 600MHz
+5V/ 6W, +3.3V/ 3W,	typ. 9W	at 1.1GHz
+5V/ 7W, +3.3V/ 9W,	max. 16W	at 1.1GHz
+5V/ 9W, +3.3V/ 11W,	typ. 20W	at 1.6GHz
+5V/10W, +3.3V/18W,	max. 28W	at 1.6GHz
+12V / -12V not used		

Environmental

Operating temp.: 0°C to +60°C standard
 -40°C to +85 °C E2 (optional)
 Storage temp.: -55°C to +85°C
 Operating humidity: 0% to 90% non-condensing
 Altitude: 50,000 ft. (15,240 m)

Ordering Information

Product	Description	Order No.
CP306 ¹⁾	Pentium® M 1.1GHz, LV, 1MByte L2 cache, 256MByte DDR-SDRAM	26712
CP306-E2 ¹⁾	Pentium® M 1.1GHz, LV, 1MByte L2 cache, 256MByte DDR-SDRAM, -40/+85 C	26714
CP306-RIO ¹⁾	Pentium® M 1.1GHz, LV, 1MByte L2 cache, 256MByte DDR-SDRAM, Rear I/O routing to J2	26713
CP306 ¹⁾	Pentium® M 1.6GHz, 1MByte L2 cache, 256MByte DDR-SDRAM	26715
CP306 ¹⁾	Pentium® M 1.6GHz, 1MByte L2 cache, 512MByte DDR-SDRAM	26716
CP306-EXT-CRT	4HP front panel extension module (2x Ethernet, 2x USB, LED's, VGA)	26717
CP306-EXT-IOIDE	8HP (additional to 4HP COM1/2, PS/2, Reset button, Floppy port, parallel port)	26718
CP-RI03-03	4HP rear I/O module (one Ethernet, COM1/2, onboard IDE connector)	26725
CP-RI03-03	8HP rear I/O module (additional to 4HP VGA, USB1/2, LED)	26726
CF128 ²⁾	CompactFlash 128MByte	23441
CP-HDD-2.5-IDE	Notebook-style 2.5" Hard disk 19GB or higher for board mounting	22531
CP-ADAP-ATA100 ³⁾	IDE cable for ATA\100 (40 pin connector with 80 lines, 3x40 pin connectors, length 0.6m)	23671
KIT-CP306 ⁴⁾	Windows Drivers, setup utilities, user's manual in PDF format on CD-ROM	26723
VXW-BSP-CP306	VxWorks Board Support Package for use with Tornado on CD-ROM	26724
LIN-INSTALLATION	Linux installation service on HDD (SuSE, RedHat or other according to request)	26939
<p>Note: ¹⁾ A front panel extension module must be ordered in conjunction with the basic CPU board.</p> <p>Other configuration options for volume orders are available on request.</p> <p>Higher clock speed when available (next generation Pentium M/Dothan processor).</p> <p>Ultra Lower Power processors (ULV) when available.</p> <p>²⁾ CompactFlash is available from 32MByte to 1GByte, also in extended temperature range -40/+85 C</p> <p>³⁾ Today's fast hard disk drives need ATA\100 cable</p> <p>⁴⁾ Free download from http://www.kontron.com or www.kontron-modular.com or www.pep.com</p> <p>For technical issues please have a look on http://www.kontron-modular.com/servicesupport/knowledgebase/search.php</p>		

Corporate Offices

US/ Canada

6260 Sequence Drive
San Diego, CA 92121-4371
Tel.: +888-294-4558
Fax: +858-677-0898
sales@us.kontron.com

Europe, Middle East and Africa

Oskar-von-Miller-Str a e 1
85386 Eching/Munich Germany
Tel.: +4981-65770
Fax: +4981-6577219
sales@kontron.com

Asia Pacific

6F, No. 9, Lane 235, Pao-Chiao Rd.,
Hsin-Tien, Taipei Hsien, 231 Taiwan
Tel.: +886-2-29103532
Fax: +886-2-29103582
sales@tw.kontron.com

Kontron Modular Computers GmbH

Sudetenstr. 7
D-87600 Kaufbeuren
Tel.: ++49 (0) 8341 803 0
Fax: ++49 (0) 8341 803 499
www.kontron.com
www.kontron-modular.com

Our worldwide sales representatives and partners can be found on our websites.